

500VAC/DC, 6x32mm, Fast Acting Fuses HV670 Series

Description

- Fast Acting, high breaking capacity under 500VAC/DC
- Special Engineering Material tube, Silver plated cap construction
- High breaking capacity for high energy application
- RoHS and Lead Free material



Electrical Characteristics	
2.0In	5 minutes, Maximum
3.0In	10 Seconds, Maximum

Specifications


Part No.	Rated Voltage	Rated Current	Breaking Capacity (A)	Typical Cold. Resistance (mOhms)	Typical Pre-Arcing I ² t (A ² Sec)
	AC/DC				
HV670.20	500V	20A	1000	5.65	125
HV670.25		25A		4.35	270
HV670.30		30A		3.5	450

* DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25°C


* Typical Pre-arcing I²t are measured at 10In Current

Dimension (mm) and ordering PN with lead Wire


HV670.XX




HV670.XXP

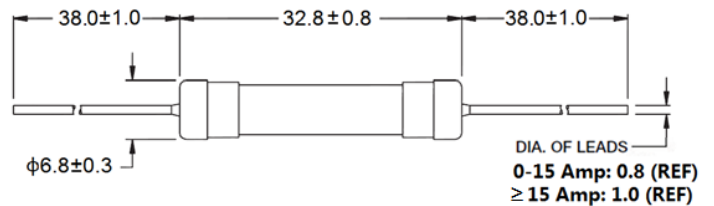

HV670.XXP-L

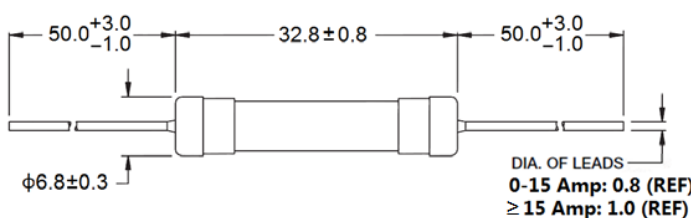

HV670.XXP-SXL

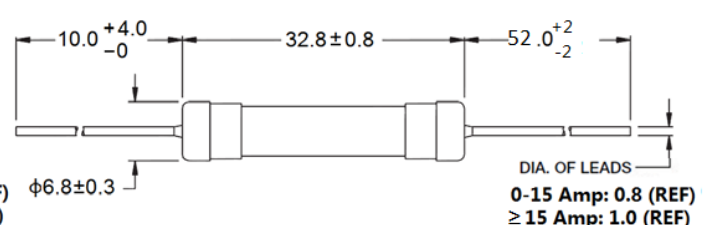

500VAC/DC, 6x32mm, Fast Acting Fuses
HV670 Series

Soldering Parameter

Wave Soldering:

Solder Pot Temperature: 270°C Max.


Solder Dwell Time: 10s Max.

Hand-Solder:

Solder Iron Temperature: 350°C +/- 5°C


Heating Time: 5s Max.

Temperature Re-Rating Curve

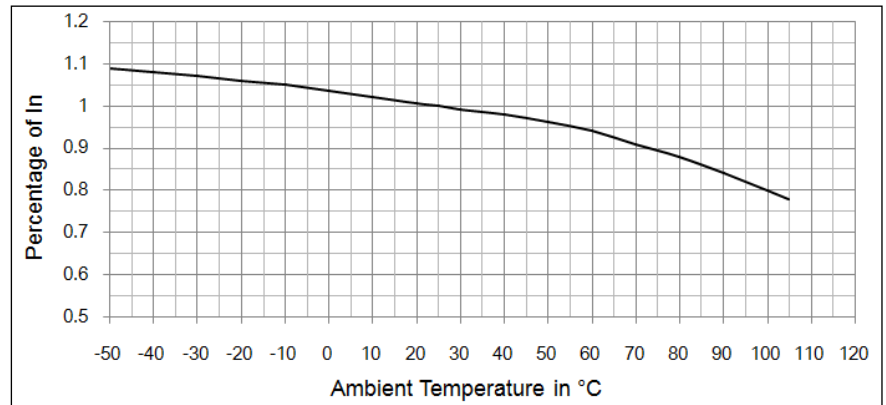

Time Current Curve

Time Current Curve

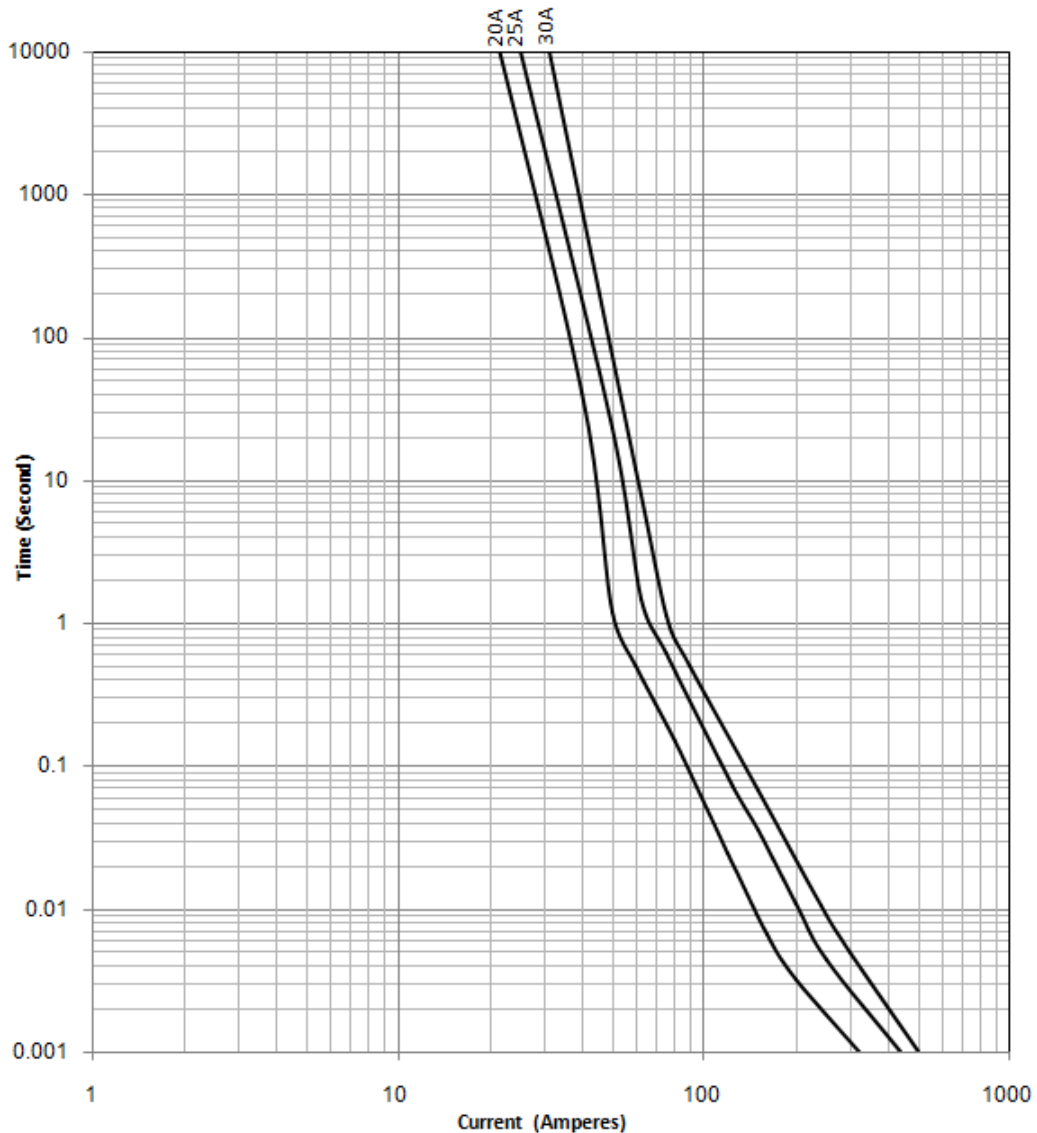

500VAC/DC, 6x32mm, Fast Acting Fuses
HV670 Series

Product Characteristics

Product Marking	Marking On Fuse Tube: Brand name, Product Series, Rated Current and Voltage, Agency approval mark
Operating Temperature	-50°C to 125°C
Terminal Strength	MIL-STD-202, Method 211, Test Condition A
Lead Solderability	MIL-STD-202, Method 208
Mechanical Vibration	MIL-STD-202, Method 201
Thermal Shock	MIL-STD-202, Method 107, Test Condition B (5 cycles -65°C to 125°C)
Humidity	MIL-STD-202, Method 103, Test Condition A: 95%RH and 40°C for 240 hours